


EZI GLIDE^(EZU)

EZU SELF LUBRICATING BUSHES
MACHINING - IMPERIAL SIZES

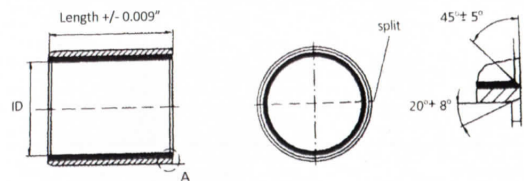

SF 1 COMPOSITE BEARING

STEEL BACKED - COPPER/TIN PLATED
SINTERED POROUS TIN BRONZE
INTERLAY

PTFE/LED OVERLAY


Manufactured to: DIN 1494
Dimensions part 2

NORMAL BEARING ID	RECOMMENDED SHAFT DIA		RECOMMENDED HOUSING BORE	
	MIN	MAX	MIN	MAX
1/8"	0.1236	0.1243	0.1873	0.1878
5/32"	0.1547	0.1554	0.2186	0.2191
3/16"	0.1858	0.1865	0.2497	0.2503
1/4"	0.2481	0.2490	0.3122	0.3128
5/16"	0.3106	0.3115	0.3747	0.3753
3/8"	0.3731	0.3740	0.4684	0.4691
7/16"	0.4355	0.4365	0.5309	0.5316
1/2"	0.4980	0.4990	0.5934	0.5941
9/16"	0.5605	0.5615	0.6559	0.6566
5/8"	0.6230	0.6240	0.7184	0.7192
11/16"	0.6855	0.6865	0.7809	0.7817
3/4"	0.7479	0.7491	0.8747	0.8755
7/8"	0.8729	0.8741	0.9997	1.0005
1"	0.9979	0.9991	1.1246	1.1256
1 1/8"	1.1226	1.1238	1.2808	1.2818

NORMAL BEARING ID	RECOMMENDED SHAFT DIA		RECOMMENDED HOUSING BORE	
	MIN	MAX	MIN	MAX
1 1/4"	1.2475	1.2488	1.4058	1.4068
1 3/8"	1.3722	1.3738	1.5308	1.5318
1 1/2"	1.4972	1.4988	1.6558	1.6568
1 5/8"	1.6222	1.6238	1.7808	1.7818
1 3/4"	1.7471	1.7487	1.9371	1.9381
1 7/8"	1.8721	1.8737	2.0621	2.0633
2"	1.9969	1.9987	2.1871	2.1883
2 1/4"	2.2489	2.2507	2.4365	2.4977
2 1/2"	2.4993	2.5011	2.6869	2.6881
2 3/4"	2.7482	2.7500	2.9358	2.9370
3"	2.9982	3.0000	3.1858	3.1872
3 1/2"	3.4978	3.5000	3.6858	3.6872
4"	3.9978	4.0000	4.1585	4.1872
5"	4.9961	4.9986	5.1844	5.1860
6"	5.9975	6.0000	6.1858	6.1874
7"	6.9929	6.9954	7.1812	7.1830

EZI GLIDE^(EZU)

EZU SELF LUBRICATING BUSHES
MACHINING - METRIC SIZES

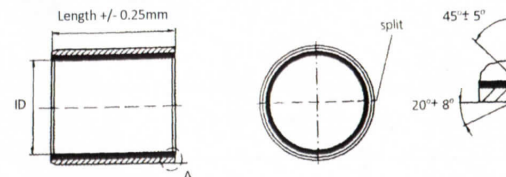

SF 1 COMPOSITE BEARING

STEEL BACKED - COPPER/TIN PLATED
SINTERED POROUS TIN BRONZE
INTERLAY

PTFE/LED OVERLAY

Manufactured to: DIN 1494
Dimensions part 2

NORMAL BEARING ID	RECOMMENDED SHAFT DIA		RECOMMENDED HOUSING BORE	
	MIN	MAX	MIN	MAX
2	1.994	2.000	3.500	3.508
3	2.994	3.000	4.500	4.508
4	3.992	4.000	5.500	5.508
5	4.978	4.990	7.000	7.0115
6	5.978	5.990	8.000	8.015
7	6.972	6.987	9.000	9.015
8	7.972	7.987	10.000	10.015
10	9.972	9.987	12.000	12.018
12	11.966	11.984	14.000	14.018
13	12.966	12.984	15.000	15.018
14	13.966	13.984	16.000	16.018
15	14.966	14.984	17.000	17.018
16	15.966	15.984	18.000	18.018
17	16.966	16.984	19.000	19.021
18	17.966	17.984	20.000	20.021
20	19.959	19.984	23.000	23.021
22	21.959	21.980	25.000	25.021
24	23.959	23.980	27.000	27.021
25	24.959	24.980	28.000	28.021
28	27.959	27.980	32.000	32.025
30	29.959	29.980	34.000	34.025
32	31.950	31.975	36.000	36.025
35	34.950	34.975	39.000	39.025
37	36.950	36.975	41.000	41.025
40	39.950	39.975	44.000	44.025
45	44.950	44.975	50.000	50.025
50	49.950	49.975	55.000	55.030
55	54.940	54.970	60.000	60.030
60	59.940	59.970	65.000	65.030
65	64.940	64.970	70.000	70.030

NORMAL BEARING ID	RECOMMENDED SHAFT DIA		RECOMMENDED HOUSING BORE	
	MIN	MAX	MIN	MAX
70	69.940	69.970	75.000	75.030
75	74.940	74.970	80.000	80.030
80	79.954	80.000	85.000	85.035
85	84.946	85.000	90.000	90.035
90	89.946	90.000	95.000	95.035
95	94.946	95.000	100.000	100.035
100	99.946	100.000	105.000	105.035
105	104.946	105.000	110.000	110.035
110	109.946	110.000	115.000	115.035
115	114.946	115.000	120.000	120.035
120	119.946	120.000	125.000	125.040
125	124.937	125.000	130.000	130.040
130	129.937	130.000	135.000	135.040
135	134.937	135.000	140.000	140.040
140	139.937	140.000	145.000	145.040
150	149.937	150.000	155.000	155.040
160	159.937	160.000	165.000	165.040
170	169.937	170.000	175.000	175.040
180	179.937	180.000	185.000	185.046
190	189.928	190.000	195.000	195.046
200	199.928	200.000	205.000	205.046
210	209.928	210.000	215.000	215.046
220	219.928	220.000	225.000	225.046
230	229.928	230.000	235.000	235.046
240	239.928	240.000	245.000	245.046
250	249.928	250.000	255.000	255.052
260	259.919	260.000	265.000	265.052
270	269.919	270.000	275.000	275.052
280	279.919	280.000	285.000	285.052
290	289.919	290.000	295.000	295.052
300	299.919	300.000	305.000	305.052